

KNOW-HOW FROM SITE TO SHELF

BUILDING TRUST



SikaLatex® 防水接著劑 與砂漿添加劑



Our most current General Sales Conditions shall apply.
Please consult the most current local Product Data Sheet prior to any use.

Sika Taiwan
338207 桃園市蘆竹區
南崁路一段83號15F-1
TEL: 03-352-8622 · FAX: 03-352-0470
sika@tw.sika.com
twn.sika.com

BUILDING TRUST



SikaLatex®



丙烯酸橡膠乳液，可用作水泥基黏著橋接和高品質現場混合砂漿添加劑。
SikaLatex® 能使砂漿增強多種優勢。

適合所有砂漿作業的添加劑

更佳的工作性

- 更高效率與壓實力

黏著力的明顯提升

- 高性能，減少回彈

提升彈性與抗凍融循環

- 減少裂縫與厚度

減少水分穿透

- 無防潮層

高耐化學性、耐腐蝕性和耐碳化性

- 持久解決方案

多功能添加劑，可提升案場混合砂漿品質

黏著劑

塗層減少開裂與灰塵。



混凝土薄層地坪

強度更高的地坪，
除塵，防水力高，
耐磨性強。




修復砂漿

低穿透性：
更佳的耐化學性、
耐腐蝕性和抗碳化性。



接縫修整 & 抹灰砂漿

提升黏著力，減少
開裂。

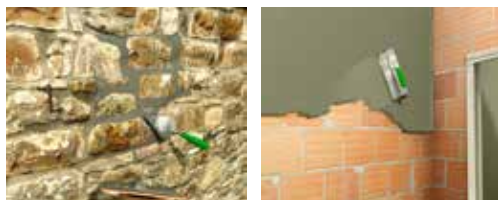

多種用途，廣泛的施工可能性

多種性能



Mortar without SikaLatex® Mortar with SikaLatex®

CHECK-OUT THE SikaLatex® VIDEO:

SikaLatex® REDUCES WATER PERMEABILITY OF MORTARS:



Mortar without SikaLatex® Mortar with SikaLatex®

ENHANCES QUALITY OF ALL KIND OF MORTAR WORKS.

MULTI USES

BONDING AGENT

- Old and fresh concrete
- Plaster
- Old sound paintings
- For non-structural repair and levelling mortars

CEMENTITIOUS SCREEDS

- Heated floors
- Dry mix screeds
- Thin layer application

REPAIR MORTAR

Admixture for masonry or non-structural concrete repair and re-profiling

POINTING & RENDERING MORTAR

- As masonry mortar for bricks and concrete blocks
- For durable joints in natural stone walls
- Compatible with cement, lime and gypsum



ROOF WORKS

- Roof tiles fixing mortar
- Mortar with improved resistance to freeze/ thaw cycles and erosion

CERAMIC TILE ADHESIVE AND TILE GROUT MORTARS

- Wet areas, where low permeability is required
- Heated floors, where high flexibility is needed

MULTI EASY

SUBSTRATE PREPARATION

- The substrate shall be thoroughly clean, free from dust, loose material, surface contamination and materials which reduce bond of the slurry or mortar.
- Saturate substrate with clean water until a dark matt appearance is achieved. Avoid ponding water.

SikaLatex® & WATER MIXING SOLUTION

Uses	Mixing solution		Water / Latex mix	Cement	Sand
	Water	Latex			
Bonding agent	1	1	1	1	
Repair mortar	2	1	0.5		2 - 3**
Cementitious Screeds*					
Heated floors	2	1		1	3
Dry mixed screeds	2		1	1	3
Thin layer screeds			1	1	2
Pointing, jointing and rendering mortars*		1	0.5	1	2 - 3**
Roof works (roof tiles fixing)	2	1	0.5	1	2
Tile fixing and pointing*	2	1	0.5	1	3

* Adjust the consistency of the mix with the quantity of mixing solution
 ** Depending of the total thickness



MORTAR PREPARATION

- Mix SikaLatex® with the correct amount of water to produce the mixing solution.
- Pour part of the mixing solution into a suitable mixing container.
- While stirring slowly, add the cement and the sand and mix thoroughly until a smooth, uniform and lump-free mix is achieved.
- Add additional mixing solution to adjust the mix to the desired consistency.

Check local mortar mixing information for detail dosages according to the uses.



SikaLatex®: TRUSTED FOR OVER 50 YEARS WORLDWIDE